


# iCLASS<sup>®</sup> Card

13.56 MHz Contactless

Contactless Smart Card

PVC Cards 2000, 2001, 2002, 2003, 2004

Composite PVC/PET cards 2100, 2101, 2102, 2103, 2104

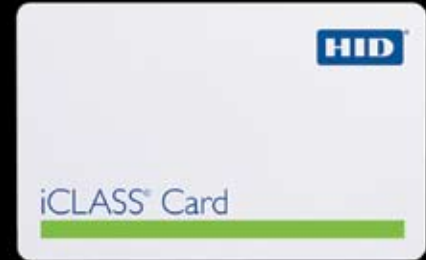

## ACCESS flexibility.

HID's iCLASS<sup>®</sup> 13.56 MHz read/write contactless smart card technology can be used for diverse applications such as access control, biometrics, cashless vending, public transportation, airline ticketing and customer loyalty programs. Multiple, securely separated files enable numerous applications and support future growth.

The iCLASS Card offers iCLASS 13.56 MHz contactless read/write smart card technology along the ability to add a magnetic stripe, barcode, and anti-counterfeiting features including custom artwork or a photo identification directly on the credential. Your iCLASS Card can now be utilized for such diverse applications including access control, network log-on security, automotive vehicle identification, cashless vending, time and attendance, and biometric verification. Multiple securely separated files enable numerous applications and can support future capabilities. The iCLASS Card meets strict ISO thickness standards for use with direct image and thermal transfer printers.

### Features:

- ▶ 13.56 MHz read/write contactless smart card technology provides high-speed, reliable communications with high data integrity.
- ▶ iCLASS technology ensures high security with mutual authentication, encrypted data transfer, and 64-bit diversified keys for read/write capabilities.
- ▶ Any existing HID format can be factory or field programmed into the secure HID access control application area.
- ▶ Available in 2k bit (256 Byte), 16k bit (2K Byte) or 32k bit (4K Byte) configurations.
- ▶ Meets ISO standards for thickness for use with all direct image and thermal transfer printers
- ▶ Add a magnetic stripe, barcode, anti-counterfeiting, or photo ID.

### All 2k bit (256 Byte) iCLASS credentials have the following features:

- ▶ Available in two application area configuration only.
- ▶ Provides the HID standard access control application area and one other application area for user customization.
- ▶ Meets ISO 15693 standard for contactless communications.
- ▶ Provides a cost effective way to improve the security of your access control installation.

### All 16k bit (2k Byte) and 32k bit (4k Byte) iCLASS credentials have the following features:

- ▶ Sufficient read/write memory to store multiple biometric templates.
- ▶ 16k available in a two or sixteen application area configuration. 32k available with 16k memory configured in either 2 or 16 application areas, plus an additional 16k user configurable memory.
- ▶ Multiple securely separated files enable numerous applications, including the HID standard access control application, and support future growth.
- ▶ Meets ISO 15693 and 14443B for contactless communications.

## Features

### Read/write Functionality for Multi-functional Memory Applications

iCLASS® was specifically designed to make access control more powerful, more versatile, and more secure. All radio frequency data transmission between the card and reader is encrypted using a secure algorithm. By using industry standard encryption techniques, iCLASS reduces the risk of compromised data or duplicated cards. For even higher security, the card data may also be protected with DES or triple DES encryption. Multiple securely separated application areas are each protected by 64-bit diversified read/write keys which allow complex applications and provide for future expansion.

Security mechanisms such as mutual authentication and encryption are efficiently combined with fast processing and data communication, resulting in transaction times of less than 100 milliseconds for a typical secure e-purse transaction.

### Proven, Reliable Technology

Offers extremely consistent read range. Unaffected by body shielding or variable environmental conditions.

### Thin

Can be carried with credit cards in a wallet or purse. Use with a strap and clip as a photo ID badge.

### Photo ID Compatible

Print directly to the card with a direct image or thermal transfer printer. Slot punch vertically for easy use.

### Long Life

Passive, no-battery design allows for an estimated minimum 100,000 reads.

### Durability

Strong, flexible, and resistant to cracking and breaking.

### Options:

- Magnetic stripe
- External card numbering (inkjet or laser engraving)
- Vertical slot punch
- Custom artwork (text or graphics)  
(Please see "How To Order Guide" for a description of the options and associated part numbers.)

### Warranty

Lifetime warranty. See complete warranty policy for details.

### Base Part Numbers

- 2000 for 2k bit (256 Byte) card
- 2001 for 16k bit (2k Byte) card with 2 application areas
- 2002 for 16k bit (2k Byte) card with 16 application areas
- 2003 for 32k bit (4k Byte) 16k/2+16k/1.
- 2004 for 32k bit (4k Byte) 16k/16 + 16k/1.

### Description

13.56 MHz contactless smart card.

## Specifications

### Typical Maximum Read Range\*

R10 2.0-3.0" (5.0-7.6cm)  
R30/RW300 2.0-3.5" (5.0-8.9cm)  
R40/RW400 2.5-4.5" (6.3-11.4cm)  
RK40/RWK400 3.0-4.0" (7.6-10.1 cm)

\*Dependent upon installation conditions.

### Dimensions

2.127" x 3.375" x 0.033" max. (5.40 x 8.57 x 0.084 cm)

### Weight

0.20oz (5.7 g)

### Card Construction

Thin, flexible polyvinyl chloride (PVC) laminate.

### Operating Temperature

-40° to 158° F (-40° to 70° C)

### Operating Humidity

5-95% non-condensing

### Operating Frequency

13.56 MHz

### RF Interface

As suggested by ISO/IEC:  
15693 read/write  
14443B mode - 106 kbps

### Transaction Time

<100 ms typical

### Baud Rate

14443 B2 mode - 212 kbps  
15693 mode - 26 kbps

### Memory Type

EEPROM, read/write

### Multi-application Memory

2k bit (256 Byte) card – 2 application areas  
16k bit (2k Byte) card – 2 or 16 application areas  
32k bit (4k Byte) card – 16k bits in 2 or 16 application areas plus 16k bits user configurable.


### Write Endurance

Min. 100,000 cycles

### Data Retention

10 years

© 2007 HID Global. All rights reserved. HID, the HID logo, and iCLASS are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners. Rev. 3/2007

 For best results, please print on recycled paper.

MKT:iCLASSCARDS\_DS\_EN



## ACCESS experience.

[hidcorp.com](http://hidcorp.com)

### HID Global Offices:

**Corporate North America**  
9292 Jeronimo Road  
Irvine, CA 92618-1905  
U.S.A.  
Phone: (800) 237-7769  
Phone: (949) 598-1600  
Fax: (949) 598-1690

**Asia Pacific**  
19/F 625 King's Road  
North Point  
Island East  
Hong Kong  
Phone: +852 3160-9800  
Fax: +852 3160-4809

**Latin America**  
Circunvalacion Ote. #201 B  
Despacho 2  
Col. Jardines del Moral  
Leon 37160, Gto.  
Mexico  
Phone: +52 477 779 1492  
Fax: +52 477 779 1493

**Europe, Middle East & Africa**  
Homefield Road  
Haverhill, Suffolk  
CB9 8QP  
England  
Phone: +44 (0) 1440 714 850  
Fax: +44 (0) 1440 714 840