



iCLASS + Prox Embeddable Card - 213

iCLASS + Prox cards can be ordered either with both SIO and iCLASS programming or iCLASS programming only, a composite fee applies to this card.

Ensure each required option has been checked with the appropriate choice to fulfill a completed order form.

Base Model **213 Composite 40% Polyester / PVC***

iCLASS Memory Size and Allocation (select one option)

- 0** - 2k Bits (256 Bytes) with 2 Application Areas
- 3** - 32k Bits (4K Bytes) Application areas 16k/2+16k/1
- 4** - 32k Bits (4K Bytes) Application areas 16k/16+16k/1

Programming (select one option)

- HP** - Programmed with Security Identity Object (SIO), and standard iCLASS access control application, 25 kHz Unprogrammed⁵
- HB** - Programmed with Security Identity Object (SIO), and standard iCLASS access control application, 125 kHz programmed with HID Prox or Indala format.
- P** - Programmed with standard iCLASS access control application, 125 kHz HID Prox unprogrammed for use with iCLASS SE Encoder.
- B** - 125 kHz Programmed with HID Prox or Indala format, iCLASS programmed with standard access control application.
- C** - iCLASS Unprogrammed, for use with iCLASS SE Encoder, HID Prox unprogrammed for use with iCLASS SE Encoder
- A** - iCLASS Unprogrammed, for use with iCLASS SE Encoder, 125 kHz programmed with HID Prox or Indala format.
- M** - iCLASS Programmed, HITAG2 blank.
- I** - iCLASS configured field programmable, HITAG2 blank.

Front Packaging (select one option)

- G** - Plain White with Gloss Finish
- C** - Custom Artwork/Contact Module with Gloss Finish – Specify Custom Artwork/Contact Module Number¹

Back Packaging (select one option)


- G** - Plain White with Gloss Finish²
- C** - Custom Artwork with Gloss Finish – Specify Custom Artwork Number¹
- 1** - Plain White with Gloss Finish with Magnetic Stripe²
- 3** - Custom Artwork with Gloss Finish with Magnetic Stripe - Specify Custom Artwork Number¹

iCLASS Card Numbering³ (select one option)

- N** - No External Card Numbering
- A** - Sequential Matching Internal/External (Laser Engraved)
- B** - Sequential Internal/Sequential Non-Matching External (Laser Engraved)
- C** - Random Internal/Non-Matching Sequential External (Laser Engraved)

Slot Punch⁴

- N** - No Slot Punch. (Printed location of vertical slot punch will remain)
- V** - Vertical Slot Punch

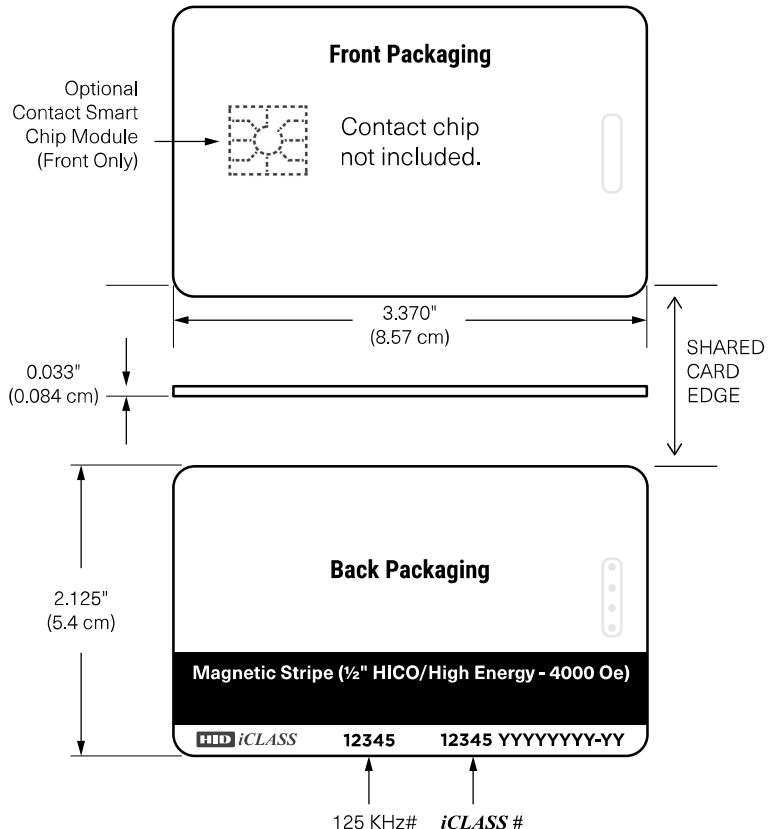

12345 = Card ID Number
YYYYYYYY-YY = Sales Order Number



125 kHz Card Numbering³ (select one option)

- N** - No External Card Numbering
- A** - Sequential Matching Internal/External (Laser Engraved)
- B** - Sequential Internal/Sequential Non-Matching External (Laser Engraved)
- C** - Random Internal/Non-Matching Sequential External (Laser Engraved)

Option - Custom Artwork¹

_____ (Specify Artwork Number - Refer to the Custom Artwork Forms for new Artwork)

Enter your final card options from check boxes above. Example: 2133CGGNNN

Final Part Number	213							-	(Options #)
-------------------	-----	--	--	--	--	--	--	---	-------------

iCLASS Programming Information

Format Number (e.g. H10301)	Field Name(s) e.g. Facility Code	Value	QTY	Encoded Start Number	Encoded Stop Number
Bit Numbers (e.g. 26 bit)				Printed Start Number	Printed Stop Number

PIN: Sequential: Start# _____ Random: Length _____

125 kHz Programming Information

Format Number (e.g. H10301)	Field Name(s) e.g. Facility Code	Value	QTY	Encoded Start Number	Encoded Stop Number
Bit Numbers (e.g. 26 bit)				Printed Start Number	Printed Stop Number

Special Instructions: _____

For Contact Smart Chip selection, contact your Regional Sales Representative. Standard configuration does not include a contact smart chip module.

¹ For new artwork files, contact Customer Service for custom artwork number, lead times and cost.

² Cards ordered with plain white front and back packaging, with no HID artwork or with custom artwork, will still have a small HID logo and reference number printed in the lower left-hand corner and a slot punch target printed on the back of the card.

³ The external card number is placed in the bottom right-hand corner for iCLASS 13.56 MHz and in bottom center for 125 kHz Prox on the back of the card.

⁴ Cards are provided with an optional vertical slot punch at no additional charge. Some video imaging printers cannot accommodate pre-slot punched cards.

⁵ Secure Identity Object (SIO) Programming is not mandatory but highly recommended. If SIO programming is not selected the letter H should be left out from Final Part Number, for example: 2130PGGNNN.

* The composite construction is recommended for all cards that will have an over-laminate applied. Consult with the printer manufacturer prior to ordering.