



iCLASS + Other 13.56 MHz + Prox Embeddable Card - 263

The iCLASS + Prox with MIFARE or MIFARE DESFire embeddable smart card offers multiple High & Low Frequency technologies to simplify card issuance for diverse systems or migration projects. Add new applications while leveraging your investment in existing access control systems. Personalize the card with a photo ID, magnetic stripe, barcode, or anti-counterfeiting element.

Ensure each required option has been checked with the appropriate choice to fulfill a completed order form.

Base Model **263 Composite 40% Polyester / PVC***

iCLASS Memory Size and Allocation (select one option)

- 0** - 2k Bits (256 Bytes) with 2 Application Areas (only available with MIFARE CLASSIC 1K)
- 3** - 32k Bits (4K Bytes) Application areas 16k/2+16k/1
- 4** - 32k Bits (4K Bytes) Application areas 16k/16+16k/1

Card Programming (select one option)

- J** - iCLASS programmed with Security Identity Object (SIO) and iCLASS standard access control application, 2nd technology programmed with Security Identity Object (SIO).
- H** - iCLASS programmed with Security Identity Object (SIO) and iCLASS standard access control application, 2nd technology unprogrammed.
- K** - iCLASS programmed with Secure Identity Object (SIO) and iCLASS standard access control application, 2nd Technology programmed with HID MIFARE (MIFARE Classic) or custom (MIFARE DESfire).
- B** - iCLASS programmed with iCLASS standard access control application, 2nd Technology programmed with HID MIFARE (MIFARE Classic) or custom (MIFARE DESfire).
- P** - iCLASS programmed with iCLASS standard access control application, 2nd Technology unprogrammed.
- C** - iCLASS unprogrammed, for use with iCLASS SE Encoder, 2nd Technology unprogrammed.
- A** - iCLASS unprogrammed, for use with iCLASS SE Encoder, 2nd Technology programmed with HID MIFARE (MIFARE Classic) or custom (MIFARE DESfire).

2nd High Frequency Technology (select one option)

- M** - MIFARE Classic 1K Bytes (only available with iCLASS 2k bits)
- N** - MIFARE 4K Bytes
- K** - MIFARE DESFire EV1 8K Bytes

3rd Low Frequency Technology (select one option)


- P** - Programmed with HID Prox or Indala format
- C** - Programmed with Indala CX (Casi Prox)
- N** - Unprogrammed HID Prox, for use with iCLASS SE Encoder

Front Packaging (select one option)

- G** - Plain White with Gloss Finish
- C** - Custom Artwork with Gloss Finish – Specify Custom Artwork Number¹

Back Packaging (select one option)

- G** - Plain White with Gloss Finish²
- C** - Custom Artwork with Gloss Finish – Specify Custom Artwork Number¹
- 1** - Plain White with Gloss Finish with Magnetic Stripe²
- 3** - Custom Artwork with Gloss Finish with Magnetic Stripe - Specify Custom Artwork Number¹

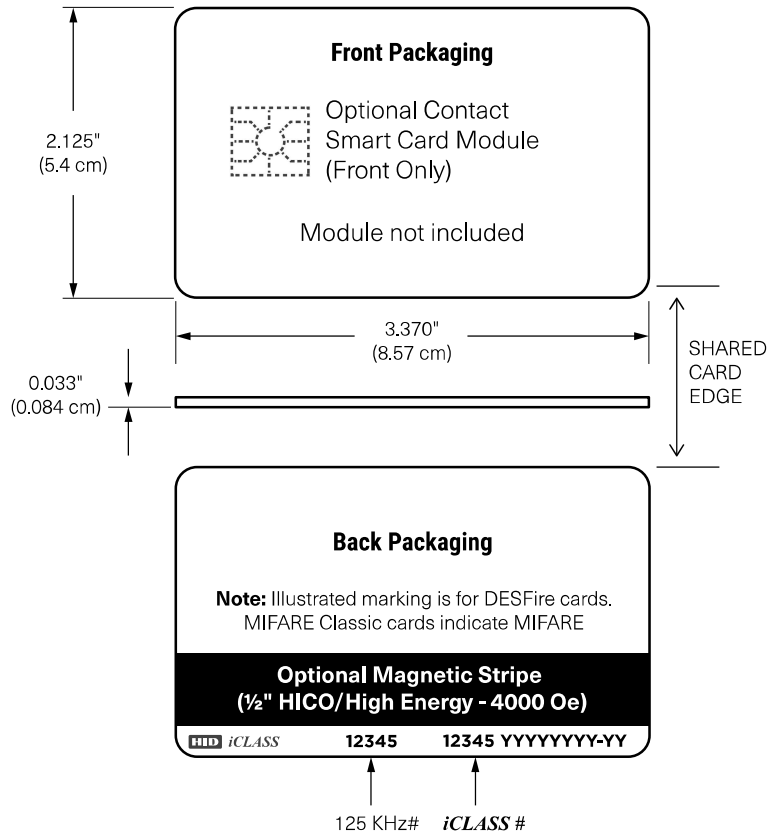



iCLASS Card Numbering³ (select one option)

- N - No External Card Numbering
- A - Sequential Matching Internal/External (Laser Engraved)
- B - Sequential Internal/Sequential Non-Matching External (Laser Engraved)
- C - Random Internal/Non-Matching Sequential External (Laser Engraved)

Slot Punch

IMPORTANT: Dual High Frequency credentials do not allow a slot punch due to the antenna design. HID recommends using a badge holder to attach this card to a lanyard or badge clip.

- N - No Slot Punch.

2nd High Frequency Technology Card Numbering³ (select one option)

- N - No External Card Numbering
- A - Sequential Matching Internal/External (Laser Engraved)
- B - Sequential Internal/Sequential Non-Matching External (Laser Engraved)
- C - Random Internal/Non-Matching Sequential External(Laser Engraved)

3rd High Frequency Technology Card Numbering³ (select one option)

- N - No External Card Numbering
- A - Sequential Matching Internal/External (Laser Engraved)
- B - Sequential Internal/Sequential Non-Matching External (Laser Engraved)
- C - Random Internal/Non-Matching Sequential External(Laser Engraved)

Option - Custom Artwork¹

_____ (Specify Artwork Number - Refer to the Custom Artwork Forms for new Artwork)

Enter your final card options from the above selections. Example: 2634JNPGGANNN

Final Part Number	263				P			N		-	(Options #)
-------------------	-----	--	--	--	---	--	--	---	--	---	-------------

iCLASS 13.56 MHz Programming Information

Format Number (e.g. H10301)	Field Name(s) e.g. Facility Code	Value	QTY	Encoded Start Number	Encoded Stop Number
Bit Numbers (e.g. 26 bit)				Printed Start Number	Printed Stop Number
ICE Number					

PIN: Sequential: Start# _____ Random: Length _____