



iCLASS SE + Other 13.56 MHz + Prox Card - 396

The SIO-enabled card with MIFARE Classic or MIFARE DESFire EV1 contactless smart card as well as HID Proximity offers multiple High Frequency technologies to simplify card issuance for diverse systems or migration projects. This card offers maximized compatibility into installations that contain iCLASS SE or MIFARE Classic / MIFARE DESFire EV1 credentials.

Ensure each required option has been checked with the appropriate choice to fulfill a completed order form.

Base Model ☒ 396 Composite 40% Polyester / PVC*

iCLASS SE Memory Size and Allocation (select one option)

- ☐ **0** - 2k Bits (256 Bytes) with 2 Application Areas
(only available with MIFARE Classic 1K)
- ☐ **3** - 32k Bits (4K Bytes) Application areas 16k/2+16k/1
- ☐ **4** - 32k Bits (4K Bytes) Application areas 16k/16+16k/1

13.56 MHz Technology Card Programming (select one option)

- ☐ **R** - iCLASS programmed with Secure Identity Object (SIO),
2nd Technology programmed with eCure Identity Object (SIO)
- ☐ **P** - CLASS programmed with Secure Identity Object (SIO),
2nd Technology unprogrammed for Use with iCLASS SE encoder
(HID MIFARE or custom encoding)
- ☐ **A** - iCLASS unprogrammed for use with iCLASS SE Encoder,
2nd Technology programmed with Secure Identity Object (SIO)
- ☐ **V** - iCLASS unprogrammed for use with iCLASS SE Encoder,
2nd Technology unprogrammed for use with iCLASS SE encoder
(SIO, HID MIFARE or custom encoding)

2nd High Frequency (13.56 MHz) Technology (select one option)

- ☐ **M** - MIFARE Classic 1K Bytes (only available with iCLASS 2k bits)
- ☐ **N** - MIFARE Classic 4K Bytes
- ☐ **K** - MIFARE DESFire EV1 8K Bytes

125 kHz Technology Card Programming (select one option)


- ☐ **P** - Programmed with HID Prox or Indala format.
- ☐ **C** - Programmed with CASI Prox.
- ☐ **N** - Unprogrammed HID Prox.

Front Packaging (select one option)

- ☐ **G** - Plain White with Gloss Finish
- ☐ **C** - Custom Artwork with Gloss Finish - Specify Custom Artwork Number¹

Back Packaging (select one option)

- ☐ **G** - Plain White with Gloss Finish²
- ☐ **C** - Custom Artwork with Gloss Finish - Specify Custom Artwork Number¹
- ☐ **1** - Plain White with Gloss Finish with Magnetic Stripe²
- ☐ **3** - Custom Artwork with Gloss Finish with Magnetic Stripe -
Specify Custom Artwork Number¹

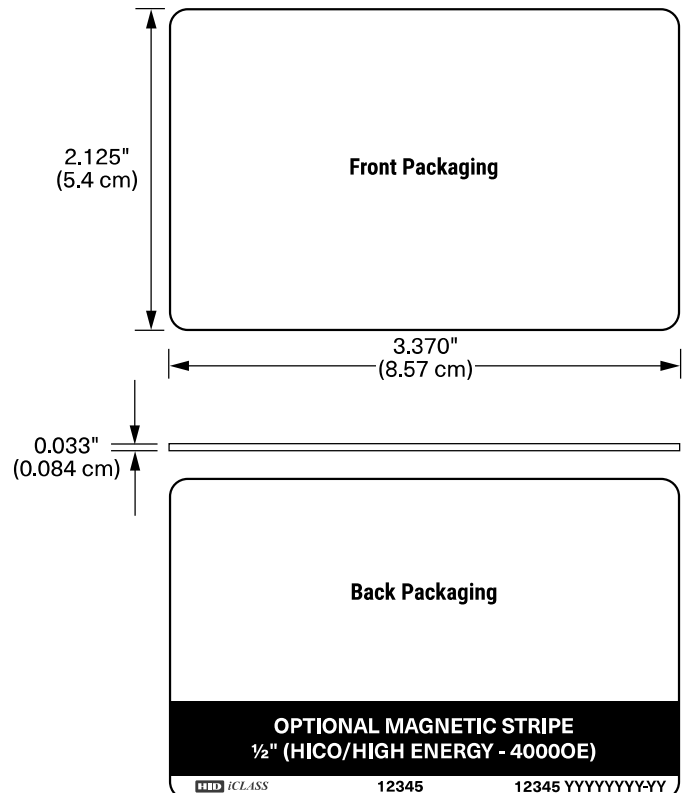

12345 = Card ID Number
YYYYYYY-YY = Sales Order Number



iCLASS SE Card Numbering³ (select one option)

- ☐ **M** - Sequential Matching Encoded/Printed (Inkjetted)⁵
- ☐ **N** - No Printed Card Numbering
- ☐ **S** - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)⁴
- ☐ **R** - Random Encoded/Non-Matching Sequential Printed (Inkjetted)⁴
- ☐ **A** - Sequential Matching Encoded/Printed (Laser Engraved)
- ☐ **B** - Sequential Encoded/Sequential Non-Matching Printed (Laser Engraved)
- ☐ **C** - Random Encoded/Non-Matching Sequential Printed (Laser Engraved)

Slot Punch

IMPORTANT: Dual High Frequency credentials do not allow a slot punch due to the antenna design.
HID recommends using a badge holder to attach this card to a lanyard or badge clip.

- ☒ **N** - No Slot Punch

2nd 13.56 MHz Card Numbering³ (select one option)

- ☐ **M** - Sequential Matching Encoded/Printed (Inkjetted)⁵
- ☐ **N** - No Printed Card Numbering
- ☐ **S** - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)⁴
- ☐ **R** - Random Encoded/Non-Matching Sequential Printed (Inkjetted)⁴
- ☐ **A** - Sequential Matching Encoded/Printed (Laser Engraved)
- ☐ **B** - Sequential Encoded/Sequential Non-Matching Printed (Laser Engraved)
- ☐ **C** - Random Encoded/Non-Matching Sequential Printed (Laser Engraved)

125 kHz Card Numbering³ (select one option)

- ☐ **M** - Sequential Matching Encoded/Printed (Inkjetted)⁵
- ☐ **N** - No Printed Card Numbering
- ☐ **S** - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)⁴
- ☐ **R** - Random Encoded/Non-Matching Sequential Printed (Inkjetted)⁴
- ☐ **A** - Sequential Matching Encoded/Printed (Laser Engraved)
- ☐ **B** - Sequential Encoded/Sequential Non-Matching Printed (Laser Engraved)
- ☐ **C** - Random Encoded/Non-Matching Sequential Printed (Laser Engraved)

Option - Custom Artwork¹

- ☐ _____ (Specify Artwork Number - Refer to the Custom Artwork Forms for new artwork)

Enter your final card options from the above selections. Example: 3964PNPGGNNM

Final Part Number								N					-	(Options #)
-------------------	--	--	--	--	--	--	--	---	--	--	--	--	---	-------------

iCLASS SE Programming Information

Format Number	Field Name(s) e.g. Facility Code	Value	QTY	Encoded Start Number	Encoded Stop Number
HID Elite ICE #				Printed Start Number	Printed Stop Number




2nd 13.56 MHz Programming Information

Format Number	Field Name(s) e.g. Facility Code	Value	QTY	Encoded Start Number	Encoded Stop Number
HID Elite ICE #				Printed Start Number	Printed Stop Number

125 kHz Programming Information

Format Number	Field Name(s) e.g. Facility Code	Value	QTY	Encoded Start Number	Encoded Stop Number
				Printed Start Number	Printed Stop Number

¹ For new artwork files, contact Customer Service for custom artwork number, lead-times, and cost.

² Cards ordered with plain white front and back packaging, or custom artwork, will still have a small HID logo  and reference number printed in the lower left-hand corner and a slot punch target printed on the back of the card. The majority of part numbers are marked with sales order number, a custom part number is required to omit all marking from the card. Contact your local support representative for details.

³ The Printed card number is placed in the bottom right-hand corner for iCLASS 13.56 MHz and in the bottom center for 125 kHz Proximity on the back of the card.

⁴ Please note that cards shipped within the Americas are always laser-engraved. Inkjetted option is not available for these cards.

* The composite construction is recommended for all cards with over-laminate applied. Consult with the printer manufacturer prior to ordering.