



## 396 - iCLASS SE + Other 13.56MHz + Prox CardOrder Form

The SIO-enabled card with MIFARE Classic or MIFARE DESFire EV1 contactless smart card as well as HID Proximity offers multiple High Frequency technologies to simplify card issuance for diverse systems or migration projects. This card offers maximized compatibility into installations that contain iCLASS SE or MIFARE Classic / MIFARE DESFire EV1 credentials.

*Ensure each required option has been checked with the appropriate choice to fulfill a completed order form.  
 Completed Order Forms can be faxed to 714-532-4234 or e-mailed to sales@mobileidsolutions.com*

### Customer Information

Company Name _____	Phone _____
Contact Name _____	Fax _____
Address _____	Email _____
Address _____	Web Order # _____

Base Model  396 Composite 40% Polyester / PVC \*

#### iCLASS SE Memory Size and Allocation (Select one option)

- 0 - 2k Bits (256 Bytes) with 2 Application Areas (only available with MIFARE Classic 1K)
- 3 - 32k Bits (4K Bytes) Application areas 16k/2+16k/1
- 4 - 32k Bits (4K Bytes) Application areas 16k/16+16k/1

#### 13.56 MHz Technology Card Programming (Select one option)

- R - SIO Programmed iCLASS & 2<sup>nd</sup> Technology. Specify Programming Information
- P - Programmed iCLASS with SIO only not 2<sup>nd</sup> Technology. Specify Programming Information.
- A - Configured, Non-Programmed iCLASS, SIO Programmed 2<sup>nd</sup> Technology. Specify Programming Information.

#### 2<sup>nd</sup> High Frequency (13.56 MHz) Technology (Select one option)

- M - MIFARE Classic 1K Bytes (only available with iCLASS 2k bits)
- N - MIFARE Classic 4K Bytes
- K - MIFARE DESFire EV1 8K Bytes

#### 125 kHz Technology Card Programming (Select one option)

- P - "HID Prox" Programmed 125 kHz Technology. Specify Programming Information
- C - "Indala/Casi Prox" Programmed 125 kHz Technology. Specify Programming Information
- N - Initialized 125 kHz Technology. Programming Information Not Required

#### Front Packaging (Select one option)

- G - Plain White with Gloss Finish
- C - Custom Artwork with Gloss Finish - Specify Custom Artwork Number<sup>1</sup>

#### Back Packaging (Select one option)

- G - Plain White with Gloss Finish<sup>2</sup>
- C - Custom Artwork with Gloss Finish - Specify Custom Artwork Number<sup>1</sup>
- 1 - Plain White with Gloss Finish with Magnetic Stripe<sup>2</sup>
- 3 - Custom Artwork with Gloss Finish with Magnetic Stripe - Specify Custom Artwork Number<sup>1</sup>

#### iCLASS SE Card Numbering<sup>3</sup> (Select one option)

- M - Sequential Matching Encoded/Printed (Inkjetted)<sup>5</sup>
- N - No Printed Card Numbering
- S - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)<sup>5</sup>
- R - Random Encoded/Non-Matching Sequential Printed (Inkjetted)<sup>5</sup>
- A - Sequential Matching Encoded/Printed (Laser Engraved)<sup>4</sup>
- B - Sequential Encoded/Sequential Non-Matching Printed (Laser Engraved)<sup>4</sup>
- C - Random Encoded/Non-Matching Sequential Printed (Laser Engraved)<sup>4</sup>


#### Slot Punch

**IMPORTANT** - Dual High Frequency credentials do not allow a slot punch due to the antenna design. HID recommends using a badge holder to attach this card to a lanyard or badge clip.

- N - No Slot Punch

#### 2<sup>nd</sup> 13.56 MHz Card Numbering<sup>3</sup> (Select one option)

- M - Sequential Matching Encoded/Printed (Inkjetted)<sup>5</sup>
- N - No Printed Card Numbering
- S - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)<sup>5</sup>
- R - Random Encoded/Non-Matching Sequential Printed (Inkjetted)<sup>5</sup>
- A - Sequential Matching Encoded/Printed (Laser Engraved)<sup>4</sup>
- B - Sequential Encoded/Sequential Non-Matching Printed (Laser Engraved)<sup>4</sup>
- C - Random Encoded/Non-Matching Sequential Printed (Laser Engraved)<sup>4</sup>

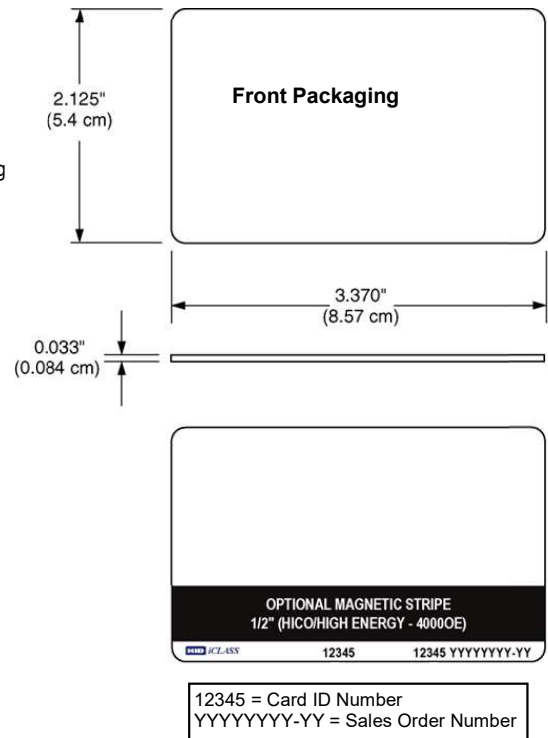



**125 kHz Card Numbering<sup>3</sup> (Select one option)**

- M - Sequential Matching Encoded/Printed (Inkjetted)<sup>5</sup>
- N - No Printed Card Numbering
- S - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)<sup>5</sup>
- R - Random Encoded/Non-Matching Sequential Printed (Inkjetted)<sup>5</sup>
- A - Sequential Matching Encoded/Printed (Laser Engraved)<sup>4</sup>
- B - Sequential Encoded/Sequential Non-Matching Printed (Laser Engraved)<sup>4</sup>
- C - Random Encoded/Non-Matching Sequential Printed (Laser Engraved)<sup>4</sup>

**Option - Custom Artwork<sup>1</sup>**

\_\_\_\_\_ (Specify Artwork Number - Refer to the Custom Artwork Forms for new artwork)

Enter your final card options from the above selections. Example: 3964PNPGNNM

<b>Final Part Number</b>									<b>N</b>					-	<b>(Options #)</b>
--------------------------	--	--	--	--	--	--	--	--	----------	--	--	--	--	---	--------------------

---

**iCLASS SE Programming Information**

---

Format Number \_\_\_\_\_ (example: H10301) Bit Numbers \_\_\_\_\_ (example: 26 bit) Facility Code \_\_\_\_\_  
 Encoded Card # Start \_\_\_\_\_ Stop \_\_\_\_\_ Printed Card # Start \_\_\_\_\_ Stop \_\_\_\_\_  
 HID Elite ICE Number (if applicable) - \_\_\_\_\_ (Custom Format) Site Code \_\_\_\_\_ City Code \_\_\_\_\_ OEM Code \_\_\_\_\_  
 Special Instructions: \_\_\_\_\_

---

**2<sup>nd</sup> 13.56 MHz Programming Information**

---

Format Number \_\_\_\_\_ (example: H10301) Bit Numbers \_\_\_\_\_ (example: 26 bit) Facility Code \_\_\_\_\_  
 Encoded Card # Start \_\_\_\_\_ Stop \_\_\_\_\_ Printed Card # Start \_\_\_\_\_ Stop \_\_\_\_\_  
 HID Elite ICE Number (if applicable) - \_\_\_\_\_ (Custom Format) Site Code \_\_\_\_\_ City Code \_\_\_\_\_ OEM Code \_\_\_\_\_  
 Special Instructions: \_\_\_\_\_

---

**125 kHz Programming Information**

---

Format Number \_\_\_\_\_ (example: H10301) Bit Numbers \_\_\_\_\_ (example: 26 bit) Facility Code \_\_\_\_\_  
 Encoded Card # Start \_\_\_\_\_ Stop \_\_\_\_\_ Printed Card # Start \_\_\_\_\_ Stop \_\_\_\_\_  
 HID Elite ICE Number (if applicable) - \_\_\_\_\_ (Custom Format) Site Code \_\_\_\_\_ City Code \_\_\_\_\_ OEM Code \_\_\_\_\_  
 Special Instructions: \_\_\_\_\_

<sup>1</sup> For new artwork files, contact Customer Service for custom artwork number, lead-times, and cost.  
<sup>2</sup> Cards ordered with plain white front and back packaging, or custom artwork, will still have a small HID logo and reference number printed in the lower left-hand corner and a slot punch target printed on the back of the card.  
<sup>3</sup> The Printed card number is placed in the bottom right-hand corner for iCLASS 13.56 MHz and in the bottom center for 125 kHz Proximity on the back of the card.  
<sup>4</sup> For Laser Engraved Printed numbers, consult factory for lead times and cost.  
<sup>5</sup> Please note that cards shipped within North America are always laser-engraved. Inkjetted option is not available for these cards.  
 \* The composite construction is recommended for all cards with over-laminate applied. Consult with the printer manufacturer prior to ordering.