



350 / 355 / 1431 / 1441 / 1437 / 1447 - MIFARE Classic + Prox card Order Form

Encompasses the industry's broadest range of open standard contactless smart card products. Provides the memory structure and capacity to store multiple applications on a single credential with the addition of Proximity technology for easier migration.

All MIFARE Classic + Prox cards can be ordered with or without SIO encoding.

*Ensure each required option has been checked with the appropriate choice to fulfill a completed order form.
 Completed Order Forms can be faxed to 714-532-4234 or e-mailed to sales@mobileidsolutions.com*

Customer Information

Company Name _____	Phone _____
Contact Name _____	Fax _____
Address _____	Email _____
Address _____	Web Order # _____

***MIFARE Classic + Prox card
 with SIO encoding (Recommended)***

OR

***MIFARE Classic + Prox card
 without SIO encoding***

- 3500 (1K) Standard PVC
- 3506 (4K) Standard PVC
- 3550 (1K) Composite 40% Polyester/PVC*
- 3556 (4K) Composite 40% Polyester/PVC*

- 1431 (1K) Standard PVC
- 1441 (4K) Standard PVC
- 1437 (1K) Composite 40% Polyester / PVC*
- 1447 (4K) Composite 40% Polyester / PVC*

Programming (Select one option)

- P** - Programmed with Security Identity Object (SIO) for MIFARE
- R** - Both interfaces programmed (MIFARE with Security Identity Object (SIO), Prox programmed with HID format)

Programming (Select one option)

- L** - Programmed, (125 kHz only with HID Format)⁶.
Specify Programming Information.
- M** - Programmed, HID MIFARE ⁶ (Specify HID format, for example H10301).
- B** - Programmed, (125kHz and 13.56 MHz with HID Format)⁶.
Specify Programming Information.
- N** - Non-Programmed (125 kHz & 13.56 MHz without HID Format)⁶.
Programming Information Not Required.
- S** - Custom Programmed, (13.56 MHz only)⁶, Prox configured
Specify Programming Information
- B** - Programmed, (125kHz and 13.56 MHz with HID Format)⁶.
Specify Programming Information.

Front Packaging (Select one option)

- G** - Plain White with Gloss Finish
- C** - Custom Artwork with Gloss Finish - Specify Custom Artwork Number¹

Back Packaging (Select one option)

- G** - Plain White with Gloss Finish²
- 1** - Plain White with Gloss Finish with Magnetic Stripe²
- C** - Custom Artwork with Gloss Finish - Specify Custom Artwork Number^{1,2}
- 3** - Custom Artwork with Gloss Finish with Magnetic Stripe - Specify Custom Artwork Number^{1,2}

13.56 MHz MIFARE Card Numbering³ (Select one option)


- M** - Sequential Matching Encoded/Printed (Inkjetted)⁵
- N** - No Printed Card Numbering
- U** - UID (CSN) HEX card numbering only (Inkjetted)⁵
- V** - UID (CSN) Decimal card numbering only (Inkjetted)⁵
- S** - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)⁵
- R** - Random Encoded/Non-Matching Sequential Printed (Inkjetted)⁵
- A** - Sequential Matching Encoded/Printed (Laser Engraved)⁴
- B** - Sequential Encoded/Sequential Non-Matching Printed (Laser Engraved)⁴
- C** - Random Encoded/Non-Matching Sequential Printed (Laser Engraved)⁴
- Z** - Reversed UID (CSN) Decimal card numbering only (Laser Engraved)⁴

Slot Punch (Select one option)

- N** - No slot punch. This card can be slotted vertically, Printed Vertical Slot Indicators
- V** - Vertical Slot Punch

125 kHz Proximity Card Numbering³ (Select one option)

- M** - Sequential Matching Encoded/Printed (Inkjetted)
- N** - No Printed Card Numbering
- S** - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)
- R** - Random Encoded/Non-Matching Sequential Printed (Inkjetted)
- A** - Sequential Matching Encoded/Printed (Engraved)⁴
- B** - Sequential Encoded/Sequential Non-Matching Printed (Engraved)⁴
- C** - Random Encoded/Non-Matching Sequential Printed (Engraved)⁴

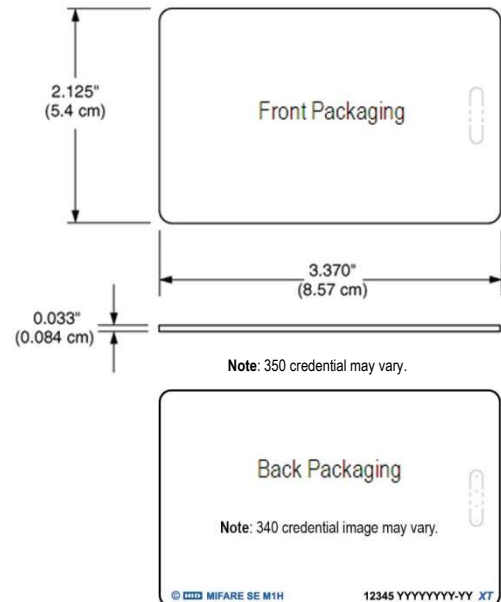



Option - Custom Artwork¹

_____ (Specify Artwork Number - Refer to the Custom Artwork forms for new artwork)

Enter your final card options from check boxes above. Example: 3506PGGMNS

Final Part Number						N			-	(Options #)
--------------------------	--	--	--	--	--	----------	--	--	---	--------------------

13.56 MHz Card Programming Information

Format Number _____ (example: H10301) Bit Numbers _____ (example: 26 bit) Facility Code _____

Encoded Card # Start _____ Stop _____ Printed Card # Start _____ Stop _____

HID Elite ICE Number (if applicable) - _____ (Custom Format) Site Code _____ City Code _____ OEM Code _____

Special Instructions: _____

125 KHz Card Programming Information

Format Number _____ (example: H10301) Bit Numbers _____ (example: 26 bit) Facility Code _____

Encoded Card # Start _____ Stop _____ Printed Card # Start _____ Stop _____

HID Elite ICE Number (if applicable) - _____ (Custom Format) Site Code _____ City Code _____ OEM Code _____

Special Instructions: _____

For Contact Smart Chip selection, refer to Logical Access How to Order Guide. Standard configuration does not include a contact smart chip module.

¹ For new artwork files, contact Customer Service for custom artwork number, lead-times, and cost.

² Cards ordered with plain white front and back packaging, with no HID artwork or with custom artwork, will still have a small HID logo _____ and reference number printed in the lower left-hand corner and a slot punch target printed on the back of the card.

³ The Printed card number is placed in the bottom right-hand corner on the back of the card on Proximity Format Programming only.

⁴ For Laser Engraved Printed numbers, consult factory for lead times and cost. When printed, by default the number is encoded MSB (most significant byte) -> LSB (least significant byte).

⁵ Please note that cards shipped within North America are always laser-engraved. Inkjetted option is not available for these cards.

⁶ Includes a permanent Unique MIFARE 32 Bit Serial number.

* The composite construction is recommended for all cards with over-laminate applied.