

## MIFARE Classic + Prox card - 350 / 355 / 1431 / 1441 / 1437 / 1447

Encompasses the industry's broadest range of open standard contactless smart card products. Provides the memory structure and capacity to store multiple applications on a single credential with the addition of Proximity technology for easier migration. All MIFARE Classic + Prox cards can be ordered with or without SIO encoding.

Ensure each required option has been checked with the appropriate choice to fulfill a completed order form.

### MIFARE Classic + Prox card with SIO encoding (Recommended)

- ☐ 3500 (1K) Standard PVC
- ☐ 3506 (4K) Standard PVC
- ☐ 3550 (1K) Composite 40% Polyester/PVC\*
- ☐ 3556 (4K) Composite 40% Polyester/PVC\*

#### Programming (Select one option)

- ☐ P - Programmed with Security Identity Object (SIO) for MIFARE
- ☐ R - Both interfaces programmed (MIFARE with Security Identity Object (SIO), Prox programmed with HID format)

### OR MIFARE Classic + Prox card without SIO encoding

- ☐ 1431 (1K) Standard PVC
- ☐ 1441 (4K) Standard PVC
- ☐ 1437 (1K) Composite 40% Polyester / PVC\*
- ☐ 1447 (4K) Composite 40% Polyester / PVC\*

#### Programming (Select one option)

- ☐ L - Programmed, (125 kHz only with HID Format)<sup>6</sup>.  
Specify Programming Information.
- ☐ M - Programmed, HID MIFARE <sup>6</sup> (Specify HID format, for example H10301).
- ☐ B - Programmed, (125kHz and 13.56 MHz with HID Format)<sup>6</sup>.  
Specify Programming Information.
- ☐ N - Non-Programmed (125 kHz & 13.56 MHz without HID Format)<sup>6</sup>.  
Programming Information Not Required.
- ☐ S - Custom Programmed, (13.56 MHz only)<sup>6</sup>, Prox configured  
Specify Programming Information
- ☐ B - Programmed, (125kHz and 13.56 MHz with HID Format)<sup>6</sup>.  
Specify Programming Information.

#### Front Packaging (Select one option)

- ☐ G - Plain White with Gloss Finish
- ☐ C - Custom Artwork with Gloss Finish - Specify Custom Artwork Number<sup>1</sup>

#### Back Packaging (Select one option)

- ☐ G - Plain White with Gloss Finish<sup>2</sup>
- ☐ 1 - Plain White with Gloss Finish with Magnetic Stripe<sup>2</sup>
- ☐ C - Custom Artwork with Gloss Finish - Specify Custom Artwork Number<sup>1, 2</sup>
- ☐ 3 - Custom Artwork with Gloss Finish with Magnetic Stripe - Specify Custom Artwork Number<sup>1, 2</sup>

#### 13.56 MHz MIFARE Card Numbering<sup>3</sup> (Select one option)

- ☐ M - Sequential Matching Encoded/Printed (Inkjetted)<sup>5</sup>
- ☐ N - No Printed Card Numbering
- ☐ U - UID (CSN) HEX card numbering only (Inkjetted)<sup>5</sup>
- ☐ V - UID (CSN) Decimal card numbering only (Inkjetted)<sup>5</sup>
- ☐ S - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)<sup>5</sup>
- ☐ R - Random Encoded/Non-Matching Sequential Printed (Inkjetted)<sup>5</sup>
- ☐ A - Sequential Matching Encoded/Printed (Laser Engraved)<sup>4</sup>
- ☐ B - Sequential Encoded/Sequential Non-Matching Printed (Laser Engraved)<sup>4</sup>
- ☐ C - Random Encoded/Non-Matching Sequential Printed (Laser Engraved)<sup>4</sup>
- ☐ Z - Reversed UID (CSN) Decimal card numbering only (Laser Engraved)<sup>4</sup>

#### Slot Punch (Select one option)

- ☐ N - No slot punch. This card can be slotted vertically, Printed Vertical Slot Indicators
- ☐ V - Vertical Slot Punch

#### 125 kHz Proximity Card Numbering<sup>3</sup> (Select one option)


- ☐ M - Sequential Matching Encoded/Printed (Inkjetted)
- ☐ N - No Printed Card Numbering
- ☐ S - Sequential Encoded/Sequential Non-Matching Printed (Inkjetted)
- ☐ R - Random Encoded/Non-Matching Sequential Printed (Inkjetted)
- ☐ A - Sequential Matching Encoded/Printed (Engraved)<sup>4</sup>
- ☐ B - Sequential Encoded/Sequential Non-Matching Printed (Engraved)<sup>4</sup>
- ☐ C - Random Encoded/Non-Matching Sequential Printed (Engraved)<sup>4</sup>

#### Option - Custom Artwork<sup>1</sup>

- ☐ \_\_\_\_\_ (Specify Artwork Number - Refer to the Custom Artwork forms for new artwork)

Enter your final card options from check boxes above. Example: 3506PGGMNS

Final Part Number						N			-	(Options #)
-------------------	--	--	--	--	--	---	--	--	---	-------------

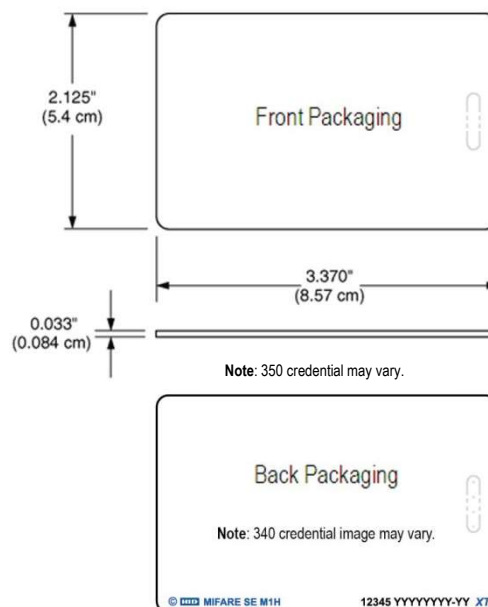



---

**13.56 MHz Card Programming Information**

---

Format Number \_\_\_\_ (example: H10301) Bit Numbers \_\_\_\_ (example: 26 bit) Facility Code \_\_\_\_  
Encoded Card # Start \_\_\_\_ Stop \_\_\_\_ Printed Card # Start \_\_\_\_ Stop \_\_\_\_  
HID Elite ICE Number (if applicable) - \_\_\_\_ (Custom Format) Site Code \_\_\_\_ City Code \_\_\_\_ OEM Code \_\_\_\_  
Special Instructions: \_\_\_\_

---

**125 KHz Card Programming Information**


---

Format Number \_\_\_\_ (example: H10301) Bit Numbers \_\_\_\_ (example: 26 bit) Facility Code \_\_\_\_  
Encoded Card # Start \_\_\_\_ Stop \_\_\_\_ Printed Card # Start \_\_\_\_ Stop \_\_\_\_  
HID Elite ICE Number (if applicable) - \_\_\_\_ (Custom Format) Site Code \_\_\_\_ City Code \_\_\_\_ OEM Code \_\_\_\_  
Special Instructions: \_\_\_\_

---

**For Contact Smart Chip selection, refer to Logical Access How to Order Guide. Standard configuration does not include a contact smart chip module.**

<sup>1</sup> For new artwork files, contact Customer Service for custom artwork number, lead-times, and cost.

<sup>2</sup> Cards ordered with plain white front and back packaging, with no HID artwork or with custom artwork, will still have a small HID logo  and reference number printed in the lower left-hand corner and a slot punch target printed on the back of the card.

<sup>3</sup> The Printed card number is placed in the bottom right-hand corner on the back of the card on Proximity Format Programming only.

<sup>4</sup> For Laser Engraved Printed numbers, consult factory for lead times and cost. When printed, by default the number is encoded MSB (most significant byte) -> LSB (least significant byte).

<sup>5</sup> Please note that cards shipped within North America are always laser-engraved. Inkjetted option is not available for these cards.

<sup>6</sup> Includes a permanent Unique MIFARE 32 Bit Serial number.

\* The composite construction is recommended for all cards with over-laminate applied.