



Seos + Prox Embeddable Card - 511

Migration solution from proximity to high security for support in HID Signo or iCLASS SE reader platform.

Ensure each required option has been checked with the appropriate choice to fulfill a completed order form.

Base Model ☒ **511 Composite 40% Polyester / PVC**

Seos Memory Size and Allocation

☐ **5** - 16K Bytes

☐ **6** - 8K Bytes

Secure Identity Object Programming (select one option)

☐ **P** - Programmed with Security Identity Object (SIO),
Prox non programmed

☐ **R** - Both interfaces programmed:
Seos with Security Identity Object (SIO),
Prox programmed with HID format

☐ **V** - Unprogrammed, for use with iCLASS SE Encoder

Front Packaging (select one option)

☐ **G** - Plain White with Gloss Finish

☐ **C** - Custom Artwork with Gloss Finish -
Specify Custom Artwork Number¹

Back Packaging (select one option)

☐ **G** - Plain White with Gloss Finish²

☐ **C** - Custom Artwork with Gloss Finish -
Specify Custom Artwork Number¹

☐ **1** - Plain White with Gloss Finish with Magnetic Stripe²

☐ **3** - Custom Artwork with Gloss Finish with Magnetic Stripe -
Specify Custom Artwork Number¹

13.56 MHz iCLASS Card Numbering³ (select one option)

☐ **N** - No External Card Numbering

☐ **A** - Sequential Matching Internal/External (Laser Engraved)

☐ **B** - Sequential Internal/Sequential Non-Matching External (Laser Engraved)

☐ **C** - Random Internal/Non-Matching Sequential External (Laser Engraved)

Slot Punch

☒ **N** - No Slot Punch

125 kHz Card Numbering³ (select one option)

☐ **N** - No External Card Numbering

☐ **A** - Sequential Matching Internal/External (Laser Engraved)

☐ **B** - Sequential Internal/Sequential Non-Matching External (Laser Engraved)


☐ **C** - Random Internal/Non-Matching Sequential External (Laser Engraved)

Option - Custom Artwork¹

☐ _____ (Specify Artwork Number - Refer to the Custom Artwork Forms for new Artwork)

Enter your final card options from check boxes above. Example: 5015PGNN

Final Part Number	511						N		-	(Options #)
--------------------------	------------	--	--	--	--	--	----------	--	----------	--------------------

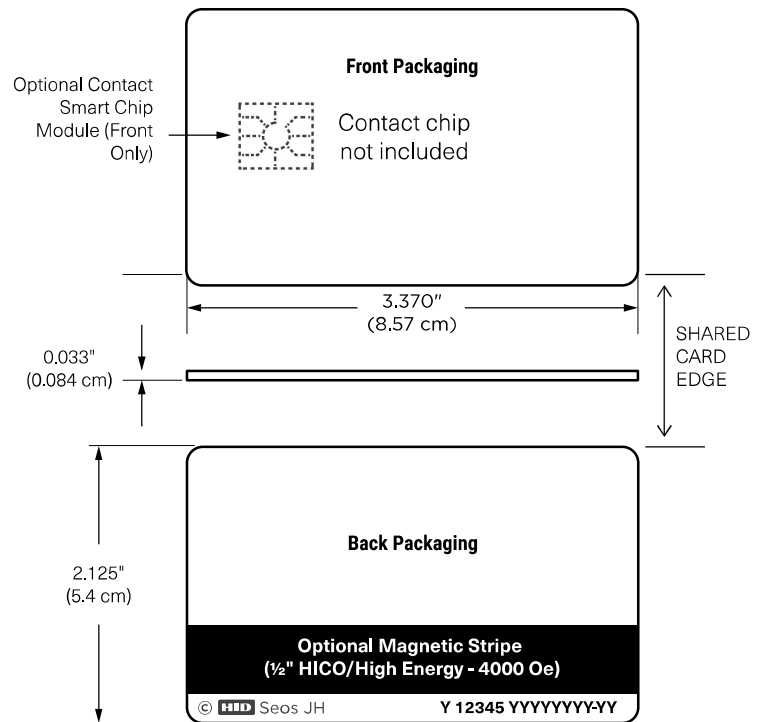

Y = Seos Programming
12345 = Card ID Number
YYYYYYY-YY = Sales Order Number
Sales Order is a variable length



Seos Card Programming Information

Format Number (e.g. H10301)	Field Name(s) e.g. Facility Code	Value	QTY	Encoded Start Number	Encoded Stop Number
Bit Numbers (e.g. 26 bit)				Printed Start Number	Printed Stop Number
ICE Number					


125 kHz Programming Information

Format Number (e.g. H10301)	Field Name(s) e.g. Facility Code	Value	QTY	Encoded Start Number	Encoded Stop Number
Bit Numbers (e.g. 26 bit)				Printed Start Number	Printed Stop Number

Special Instructions:	
-----------------------	--

For Contact Smart Chip selection, contact your Regional Sales Representative. Standard configuration does not include a contact smart chip module.

¹ For new artwork files, contact Customer Service for custom artwork number, lead-times, and cost.

² Cards ordered with plain white front and back packaging, or custom artwork, will still have a small HID logo  and reference number printed in the lower left-hand corner and a slot punch target printed on the back of the card.

³ The external card number is placed in the bottom right-hand corner on the back of the card.

⁴ Available with 7 byte static UID for ISO14443A UID migration and interoperability. This feature reduces privacy and is not recommended. Contact your local sales or pre-sales representative for detail.